



## Log Cabin "DSV" series 5.5×5.5

Project Dimensions

5.5 × 5.5 / 40 m<sup>2</sup>

Full house set

**5,296 €**

### Timber



45 MM



65 MM  
+ 1,085 €




## Project planning






Разрез

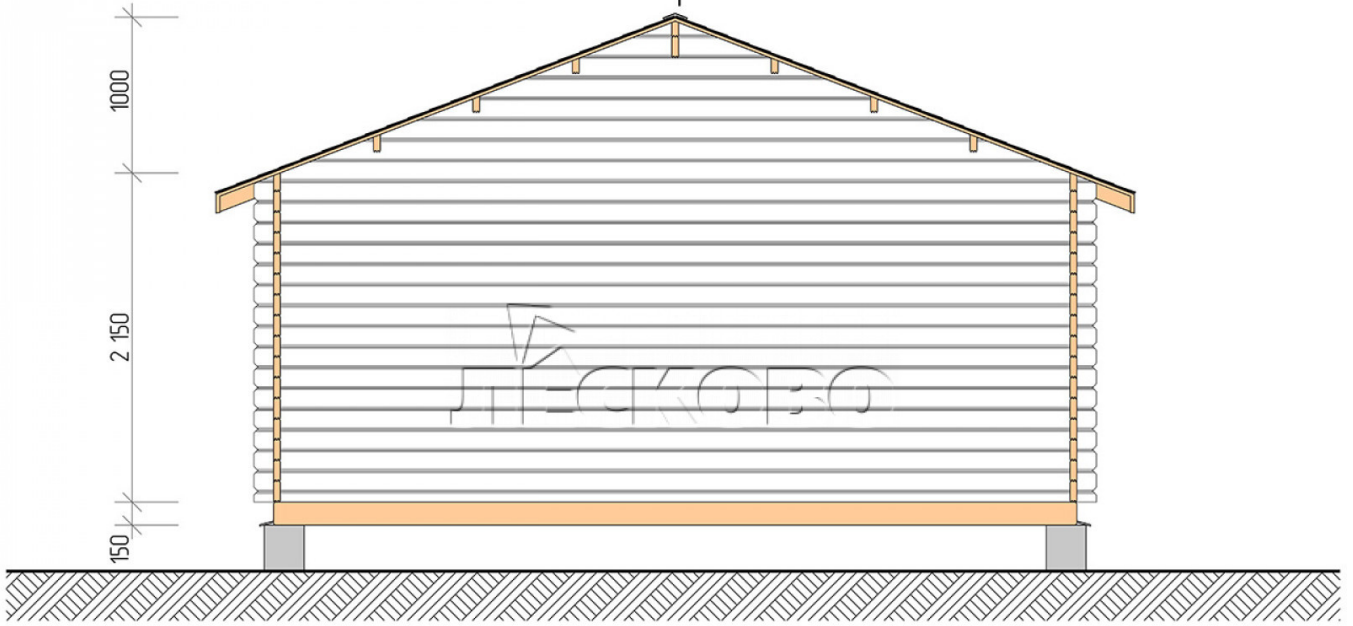



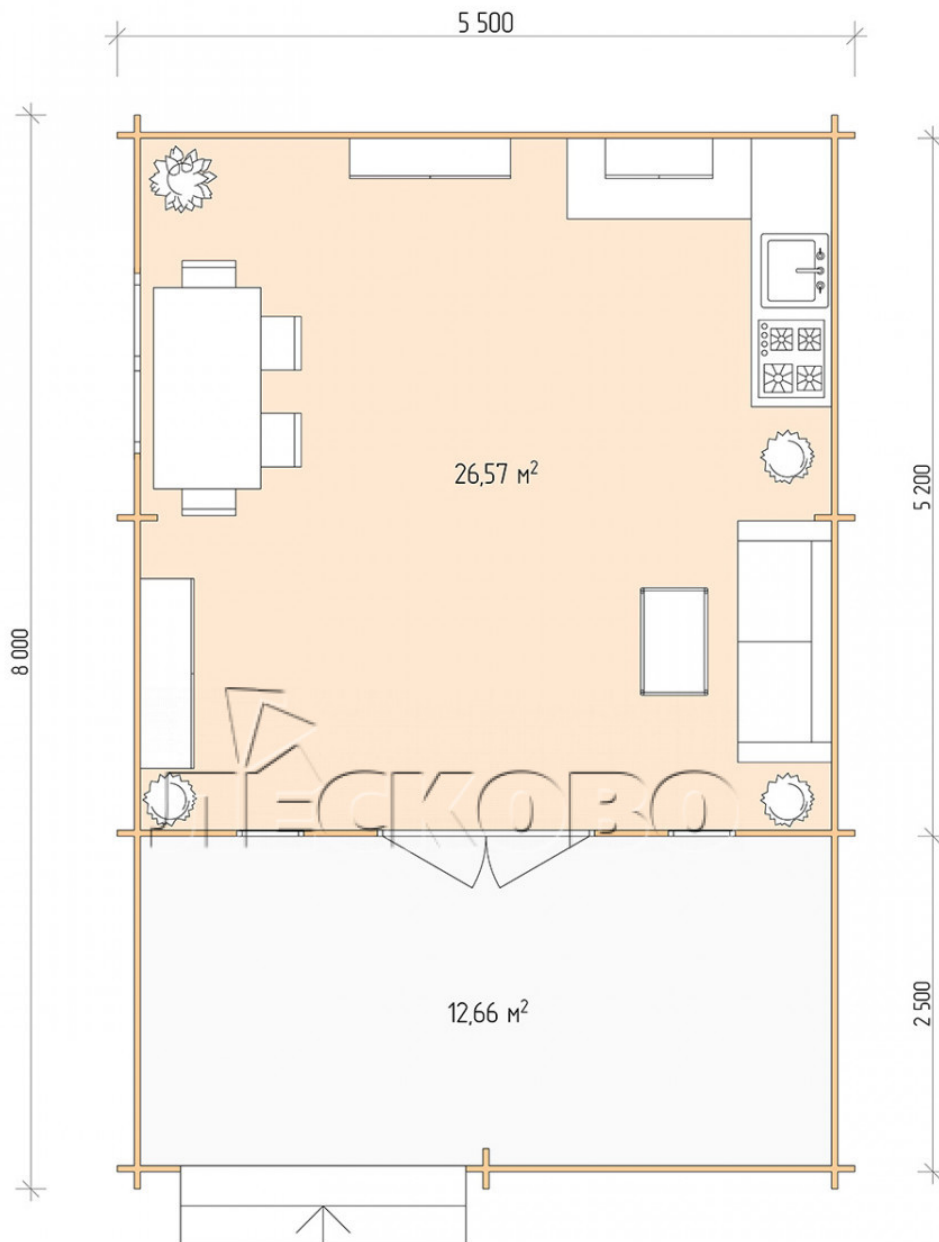

## House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



0.42×1.885 м.2 шт.



1.34×0.91 м.1 шт.


- Wooden doors;



1.62×1.885 м.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.

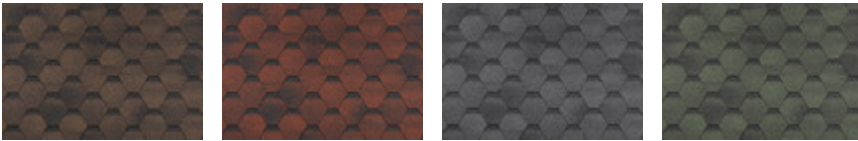

9. Skirting board 35 mm.

+7 (927) 738-08-11

г. Самара, ул. Дачная, д. 28, оф. 7